

# SNOWDOZER WING

SNOW PLOW WITH WINGS

KAGE®



30k-50k lb Loaders (Floating Quick Attach)  
300+ HP Tractors (Cat II 3-pt Hitch)

## FAR BEYOND "WINGING IT"

With the SnowDozer Wing, your snow removal options on sizeable machines are limitless. Rich with self leveling, float and breakaway safety features, this is a large wing plow with a short learning curve and minimal maintenance.

Top that with its attention to detail, and you'll find it produces the best scrape without spillage, leakage, skimming or skipping.

## KEY FEATURES



### Simultaneous Wings

The simple 2-button control allows the operator to move the wings simultaneously or individually.



### Tight Fitting Hinges

Tight-fitting hinges and rubber flaps prevent snow from leaking between the moldboard and wing to limit cleanup.



### Floating Skids

With 6-7" of oscillating vertical travel, the floating skids enable quick leveling, ride over curbs and wear evenly.



### Angle Plow

Equipped with 34-degree power angling to easily direct snow to the side for windrow-ing and more.



### Trip Wing Edge

Each wing has a trip edge that trips back 55 degrees to clear curbs and other obstacles.




### Crossover Relief

Both wings and moldboard are protected by hydraulic crossover relief preset at 1700 and 2500 PSI respectively



### Infinitely Adjustable

Both wings are adjustable up to 180 degrees with no pre-set stopping points, providing a wide range of mobility.




### Double Acting Cylinders

These cylinders are easy to obtain and easy to repair.









# KAGE® SnowDozer™ Wing Plow Specifications

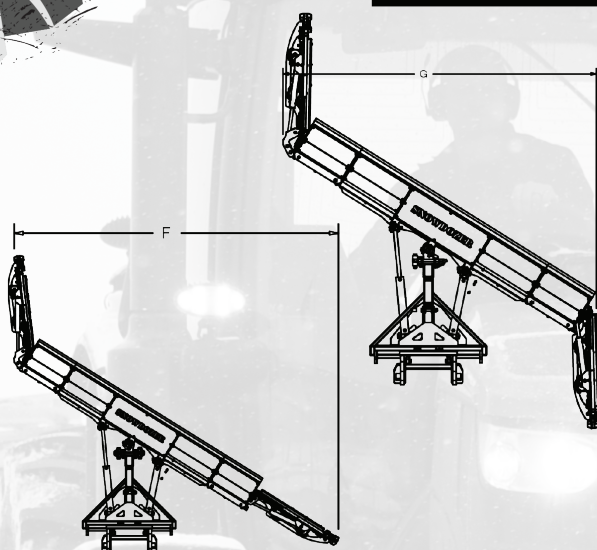


Approximate Dimensions For Reference Only - Weight Range Depends on Cutting Edge & Attachment Type								
Width Range	A Inches	B Inches	C Inches	D Inches	E Inches	F Inches	G Inches	H Weight
12'-20'	155	240	164	53	218	193	137	4,611-5,650
14'-22'	179	264	188	53	242	215	159	4,771-5,880
16'-24'	203	286	212	53	266	236	180	5,165-6,360
18'-26'	227	310	336	53	290	257	201	5,315-6,390
12'-22'	155	264	360	65	226	208	137	4,911-5,950
14'-24'	179	286	384	65	250	230	159	5,071-6,180
16'-26'	203	310	408	65	274	250	180	5,465-6,660
18'-28'	227	334	432	65	298	272	201	5,615-6,690
1200 Tractor Under-Hitch								1,400

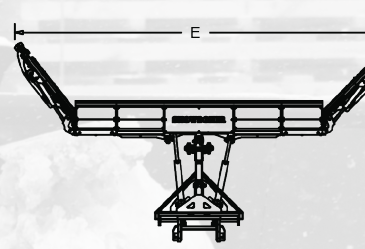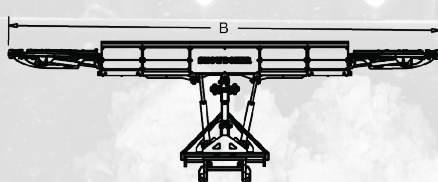


Dual Moldboard Trip Edges

Wing Trip



84.58 degrees



7.5" Vertical  
Toe Travel



6.625" Vertical  
Heel Travel

Wing Mode



Wide Mode



Backdrag Mode



Box Mode

